


# RF Directional Coupler

## ECJ0901-B009005


2020-04-07 Rev. 0




75Ω 9dB Directional Coupler

5-1250MHz


### Outline Drawing(mm)

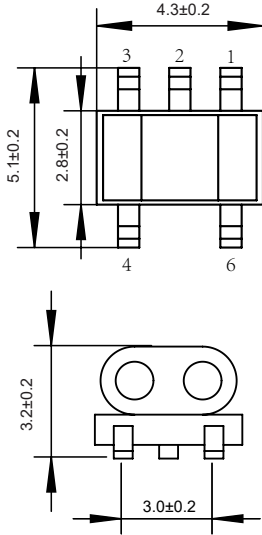

### Electrical structure



### Recommended layout(mm)



### Pin Connections

Input	1
Coupling	3
Output	6
Ground	2
External 75-Ohm	4

### Features





- Operating temperature range: -40°C to +85°C
- Storage temperature range: -55°C to +100°C

### Applications


- For catv
- For broadband and wireless communications

### Electrical Specifications: TA=25°C, 0dBm, Z0=75Ω

Parameter	Test Conditions	Units	Min	Typ	Max
Coupling(pin1-3)	5-1250MHz	dB	8.0	9.0	10.0
Main line Loss(pin1-6)	5-1250MHz	dB	—	1.8	2.8
Input Return Loss(pin 1)	5-1250MHz	dB	16.0	25.0	—
Coupling Return Loss(pin3)	5-1250MHz	dB	13.0	18.0	—
Output Return Loss(pin6)	5-1250MHz	dB	16.0	25.0	—
Isolation(pin3-6)	5-1250MHz	dB	20.0	24.0	—

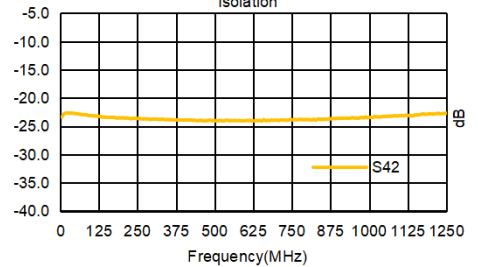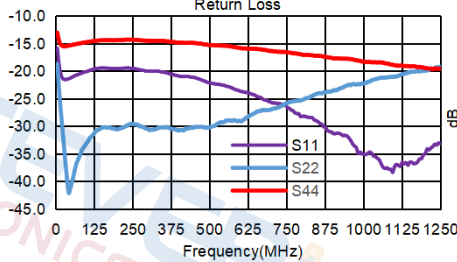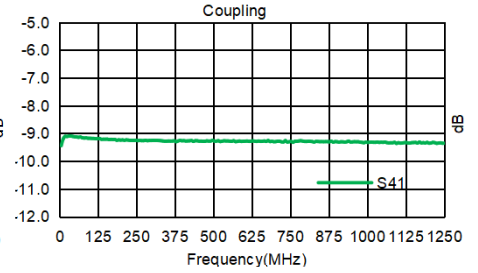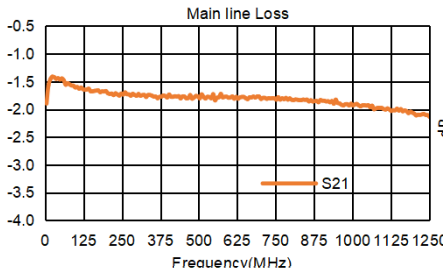

### Carrier Tape Orientation

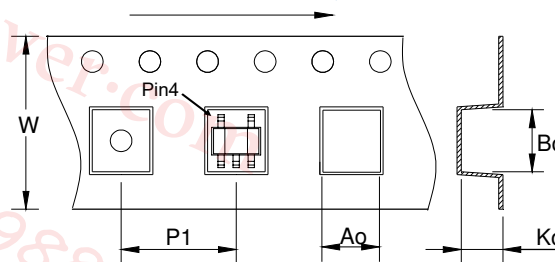

### Tape & Reel Information

Parameter	Units	Value
Qty per reel	PCS	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.50
Bo	mm	5.70
Ko	mm	3.60