


1、 DIMENSION DIAGRAM (Unit: mm)

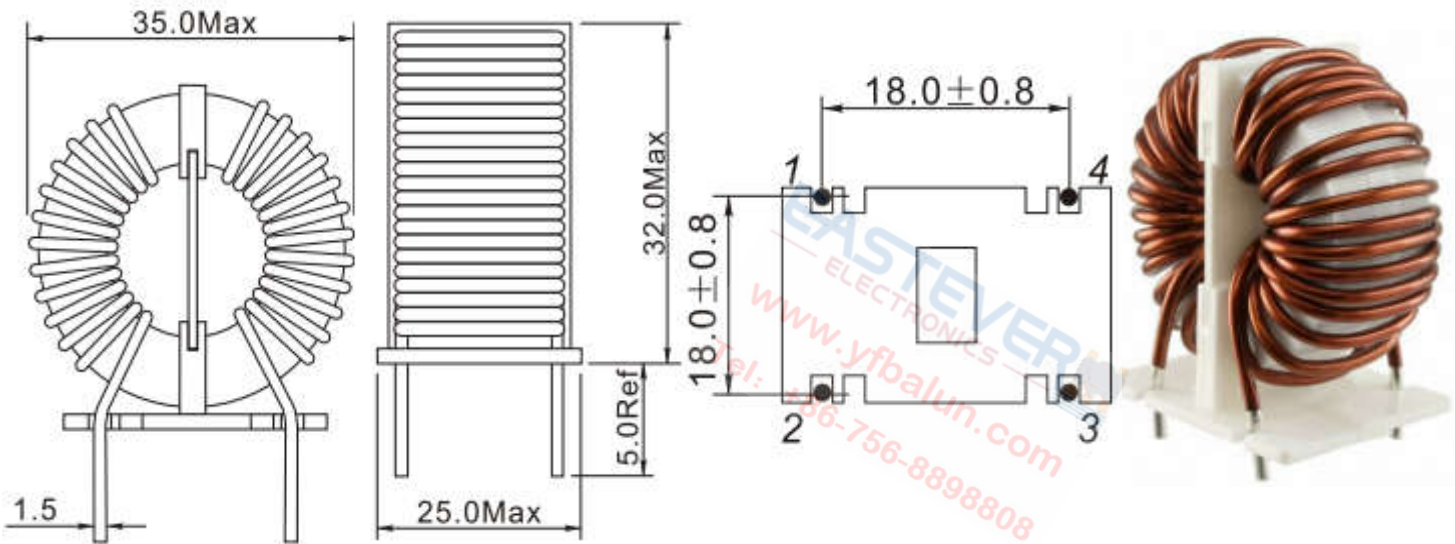

2、 BILLOF MATERIALS

CORE:T31X19X13-R5K

CASE: CASE-007


WIRE: 2UEW-1.40

SPACER:19.0X13.0X1.0

EPOXY:G500/H210

SOLDER:Sn99.3Cu0.7

3、 ELECTRICAL STRUCTURE

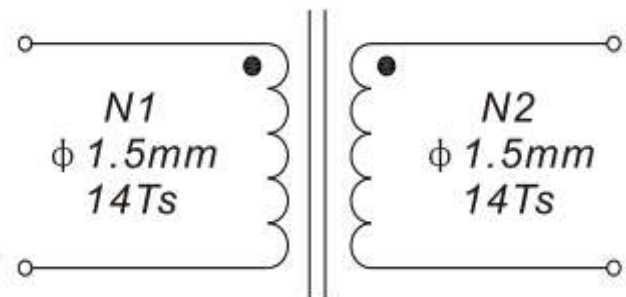

4、 ELECTRICAL CHARACTERISTICS

TEST FREQUENCY : 1.0KHz/1.0V

INDUCTANCE : 1-2=3-4=1.0mH Min

RDC : 1-2=3-4=0.007Ω Max

RATED CURRENT : 15.0A Max

HI-POT TEST : 1500V/AC 50Hz N1 to N2